

### Applications

Beach cleaning  
Farm cleaning

Kids playground cleaning  
Sports field cleaning

### Main features

Hydraulic depth control, from 0 to 20 centimetres  
Hydraulic bucket discharge  
Removable grids (5x5, 10x10, 15x15 or 20x20mm)  
ACD control for full control from the cab

Back blade for nice finish  
Diverter valve and drain line in case of overflow  
Auto-lubricating bearing seal  
Maintenance free


### Compatibility

Description	Item number	Compatible with loader
SC200	7280080	T590E V, T66, T76, T770E T3, T770B T3, T870E IV, T870B T3, S450 V, S66, S630E iT4, S650B iT4, S76, S770E IV, S770E T3, S770B T3, S850E T3, S850B T3, S850E IV, T770E IV, S530B, S86, T86

### Characteristics and performance

Description	Item number	Working width (mm)	Working depth (up to) (mm)	Bucket capacity (L)	Performance	Working Pressure (bar)	Working Flow (L/min)
SC200	7280080	1900.0	200.0	350.0	up to 15000 m <sup>3</sup> /h	80.0	40.0

### Weights and dimensions

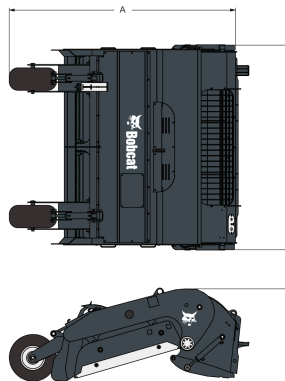

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
SC200	7280080	660.0	660.0	1980.0	2000.0	824.0